

ORDINANCE NO. 274

AN ORDINANCE PROVIDING FOR THE METHOD OF BACKFILL OF ALL BITUMINOUS SURFACED STREETS OR ROADWAYS IN THE VILLAGE OF BELLEVUE, PEORIA COUNTY, ILLINOIS, AND PRESCRIBING THE PENALTY FOR NON-COMPLIANCE HEREWITH.

BE IT ORDAINED BY THE PRESIDENT AND BOARD OF TRUSTEES OF THE VILLAGE OF BELLEVUE, PEORIA COUNTY, ILLINOIS:

SECTION 1. In all excavations in the traveled portion of any street or highway having a bituminous surface, all openings shall be back-filled with a select granular material and jeted to a depth of fill, eight inches below the top surface of such street. The next six inches shall shall be filled with white rock rejects and be well tamped. The remaining two inches and flush to the surface of such street or roadway, shall be of bituminous mixturo complete and tamped. All openings shall have the upper eight inches extend to at least one foot on all sides from the excavation and filled as above set forth.

SECTION 2. The attached drawing of a typical section is made a part hereof for guidance and compliance herewith.

SECTION 3. Any failure to fully comply herewith shall result in the Village, without further notice, engaging a contractor to perform the work properly, including the removal of fill deemed improper, and charges made against the bond or against the person or firm who made the original opening and no new opening permits will be issued until full compliance and payment for expenses.

SECTION 4. This ordinance shall be in full force and effect as published in pamphlet form, and being done herewith, is in force upon the adoption hereof.

Passed and adopted in regular public session of the Village Board of the Village of Bellevue, Peoria County, Illinois, this 26th day of May, A. D. 1981.

*William G. Sandhu*

Village President

ATTEST:

*Larry N. Howard*


Village Clerk

Approved: May 26, 1981.

*William G. Sandhu*

Village President

VILLAGE OF BELLEVUE  
STANDARD DETAIL OF TRENCH BACKFILL & RESURFACING

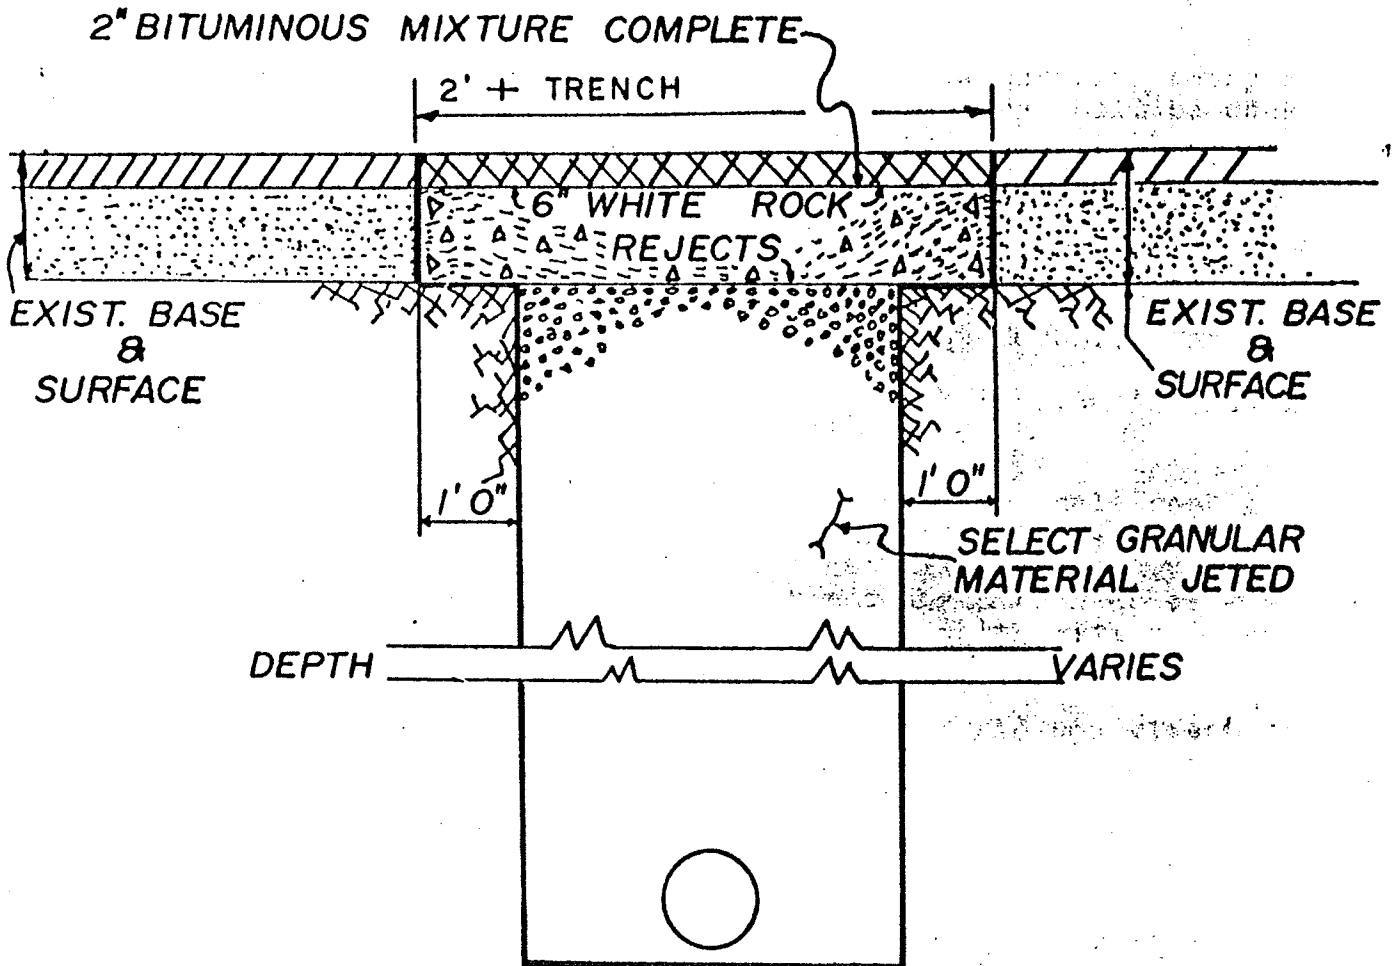

TYPICAL SECTION  
OF TRENCH BACKFILL & SURFACE TREATMENT  
(NO SCALE)

NOTES:

- 1) In lieu of 6" stone and 2" blacktop use 8" concrete
- 2) Excavator will maintain trench as a suitable driving surface until trench is completed as shown.
- 3) Village officials shall be notified before backfill or resurfacing begins.

BY AFFOLTER AND BETTLER